


Dimmable LED Drivers—LKAD026D

—产品特性/Feature—

- 200-240VAC (50/60Hz) 输入 / 200-240VAC (50/60Hz) Input
- 隔离方案, 前切 (或后切) / 电子式, 可控硅调光, 调光非常流畅/Isolated, leading (or trailing)/MOS triac dimming, dimming much smoothly;
- 高效率、高功率因素, 稳定性好/ High efficiency, high PF, good steady;
- 短路保护, 过流保护, 过压保护, 过温保护/ Short circuit, over voltage, over current and over temperature protection;
- 100%满载老化测试 / 100% full load burn-in test;
- 兼容市面上绝大部分调光控制系统 (98%以上)。Compatible with most dimming control systems on the market
- 独立外置, Class II 恒流类型 / independent, Class II constant current type;
- 防护等级 IP20 / degree of protection IP20;
- 采用自主知识产权单片机控制方案, 可以做到0.1%调光解晰度 / By adopting the control scheme of single chip microcomputer with independent intellectual property rights, 0.1% dimming resolution can be achieved lighting, ceiling light, down light and panel light;
- 3年质保期 / 3 years warranty.



产品参数/Specification

Model		LKAD026D	
输入 Input	输入电压范围/Input Voltage range	200-240V	
	频率/Frequency	50/60hz	
	谐波/THD	≤10%	
	功率因数/Power factor	0.97/240VAC	
	输入电流 Input current (mA)	122MA	
	待机功耗 stand_by power	≤0.5W/240VAC	
	浪涌电流 Inrush Current (Max.)	≤15A@240VAC	
	漏电流 Leakage Current	<1MA/240V	
输出 Output	额定电压/Rated voltage	80V	
	空载电压/No-load Voltage	≤86V	
	工作电压范围/working voltage range	45-80V	
	额定电流规格/Rated current specification	320mA ± 15MA	
	电流精度/Current precision	(+/-) 5%	
	额定功率/Rated power	25W	
	开机延时/Setup Time	≤0.5s/240VAC	
	输出线性调整率Output Line Regulation	±5%	
	温度漂移temperature drift	±10%	

保护特性	开路保护Output open circuit protection	有/Enable	
	短路保护Short Circuit Protection	打嗝模式/Hiccup mode	
使用环境 Environment Requirements	工作温度/湿度要求 Operating Temp./RH	-30~+45°C/20~95%	
	储存温度,湿度要求 Storage Temp./RH	-40~+80°C/10~95%	
安全和电磁兼容 Safety & EMC	认证编号/Certificate	符合CE/ meet CE	
	耐压 withstand voltage	3750MA/60S	
	绝缘阻抗insulation resistance	500V>100M	
	浪涌等级EMS immunity	IEC6100-4-5 (L-N:1KV)	
	安规标准Safety standard	EN61347, GB19510	
	电磁干扰electromagnetic interference	EN55015, EN61000-3-2	
	电磁抗干扰Electromagnetic Susceptibility	EN61000-4-2. 3. 4. 5. 6. 8. 11. EN61547	
其他 Others	IP等级说明 IP level description	IP20	
	质保说明Warranty instructions	3年/3 years	
	尺寸/Size	135*45*28	
	重量/Netweight	105g	
注意事项 matters needing attention	<p>1. 建议客户在灯具供电回路中安装过欠压保护与浪涌保护装置, 以确保用电安全 1. pls suggest the client to install the unde voltage protection device and surge protection device to ensure Electricity safety</p> <p>2. 电源作为整灯灯具中的一个零部件与终端设备结合使用, 因EMC性能受LED灯具及走线的影响, 终端设备制造商需对整套装置重新进行EMC确认。 2. The power supply is considered a component which will be installed a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</p> <p>3. 客户在使用电源时, 注意电源通风散热和环境温度, 超过TA时要做降额使用 3. Becareful of ambient temperature and heat dissipation during the client use this unit, When exceeding TA, the power supply shall be derated</p>		

测试数据/Test data

输入电压 Input voltage (Vac)	输入电流 Input current (mA)	输入功率 Input power (W)	功率因数 PF	输出电压 Output voltage (Vdc)	输出电流 Output current (mA)	输出功率 Output Power (W)	转换效率 Efficiency (%)
240V	122.80	28.73	0.976	80.00	320	25.60	89.1%
	116.00	27.17	0.978	75.00	320	24.00	88.3%
	108.90	25.45	0.976	70.00	320	22.40	88.0%
	94.39	21.91	0.969	60.00	325	19.50	89.0%
	8026.00	18.43	0.958	50.00	325	16.25	88.2%
	73.27	16.70	0.952	45.00	330	14.85	88.9%
200V	150.40	29.67	0.988	80.00	320	25.60	86.3%
	141.30	27.81	0.986	75.00	322	24.15	86.8%
	132.20	25.98	0.984	70.00	322	22.54	86.8%
	114.20	22.35	0.980	60.00	324	19.44	87.0%


200V	96.08	18.70	0.974	50.00	328	16.40	87.7%
	87.28	16.90	0.969	45.00	327	14.72	87.1%

调光测试效果Dimming effect


(负载带灯测试/Load with lamp test)

编号 NO	调光器型号 Dimmer Type	最小电流 Min current (mA)	最大电流 Max current(mA)	调光比 Dimming ratio	调光效果 Dimming effect
1	威斯堡 (230V~)	3.2MA	320MA	1-100%	OK
2	CLIPSAL 250V 2A	16MA	320MA	5-100%	OK
3	KEEY 220V~	3.2MA	320MA	1-100%	OK
4	T & J(200-240V) (25-630W)	3.2MA	320MA	1-100%	OK
5	SIEMENS (220V~) (40-500W)	16MA	320MA	5-100%	OK
6	Leimove(220V~)630W	16MA	320MA	5-100%	OK
7	Scrnaideir 220V 300W	16MA	320MA	5-100%	OK
8	TCL 220V 630W	16MA	320MA	5-100%	OK

产品尺寸图/ Product Size Diagram

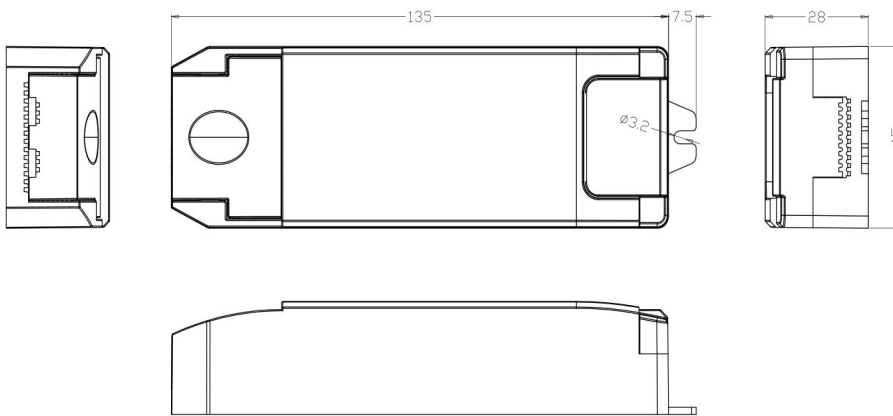

产品接线示意图/ Product Connection Diagram

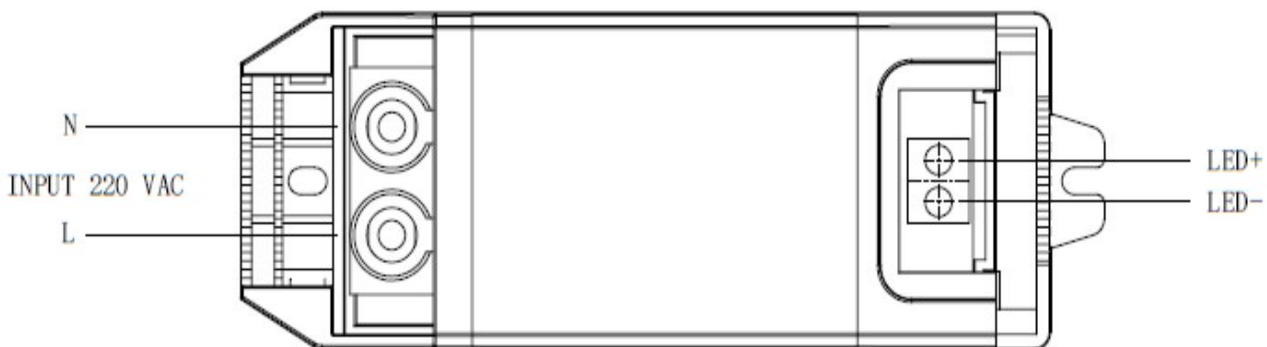

备注/Note:

"1. 所有没提及到的参数都是在230V输入，额定负载和在周围温度为25°C的情况下测试的；
All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature;

2.注意接线的方向，不要搞反输入和输出端

Pay attention to the direction of wiring, do not reverse the input and output terminals

广东领冠智能科技有限公司

Guangdong Linkuan Smart Tech Co.,Ltd

地 址：广东省东莞市万江区大莲塘工业区3号

Address: NO.3 Building, Daliantang Industrial Park,

Wanjiang

District,Dongguan,Guangdong,China

Tel:+86-769-23129651

Fax:+86-23129652